

MINI Pi12-3 FS



MINI Pi12-3 FS



- Three-stage COAX® cartridge - MINI - with high initial vacuum flow.
- Includes a flow-through silencer and a built-in vacuum filter for harsh environments.
- Vacuum level to 90 -kPa at low feed pressure.
- High system reliability in case of fluctuating or low feed pressure.
- Suitable for handling sealed objects with high pick-up speed.

Vacuum flow

Feed pressure*	Air consumption	Vacuum flow (NI/s) at different vacuum levels (-kPa)										Max vacuum
		0	10	20	30	40	50	60	70	80	-kPa	
0.17	0.29	0.90	0.40	0.22	0.15	0.07	—	—	—	—	—	49
0.22	0.34	1.10	0.48	0.29	0.20	0.14	0.08	0.02	—	—	—	64
0.314	0.44	1.40	0.60	0.44	0.27	0.19	0.14	0.10	0.06	0.03	—	90
0.40	0.53	1.40	0.70	0.52	0.39	0.24	0.12	0.10	0.06	0.02	—	84

*Feed pressure tolerance, +/- 0.01 MPa

Evacuation time

Feed pressure*	Air consumption	Evacuation time (s/l) to reach different vacuum levels (-kPa)									Max vacuum
		10	20	30	40	50	60	70	80	-kPa	
0.17	0.29	0.15	0.46	1.00	2.00	—	—	—	—	—	49
0.22	0.34	0.10	0.32	0.75	1.40	2.20	2.90	—	—	—	64
0.314	0.44	0.08	0.23	0.49	1.00	1.70	2.60	3.90	6.30	—	90
0.40	0.53	0.09	0.24	0.45	0.76	1.40	2.40	3.70	7.00	—	84


*Feed pressure tolerance, +/- 0.01 MPa

Blow flow

Feed pressure	Air consumption	Blow flow (NI/s) at different pressure levels (kPa)												Max pressure
		0	20	40	60	70	80	90	100	110	120	130	140	
0.6	0.75	1.87	1.4	1.33	1.12	1.03	1.03	1.03	1.03	1.0	0.95	0.86	0.79	140

Ordering information

Description	Art. No.
E COAX® cartridge MINI Pi12-3, holding cap silencer, vacuum filter	0104265
F COAX® cartridge MINI Pi12-3, extra non-return valve, holding cap silencer, vacuum filter	0106676

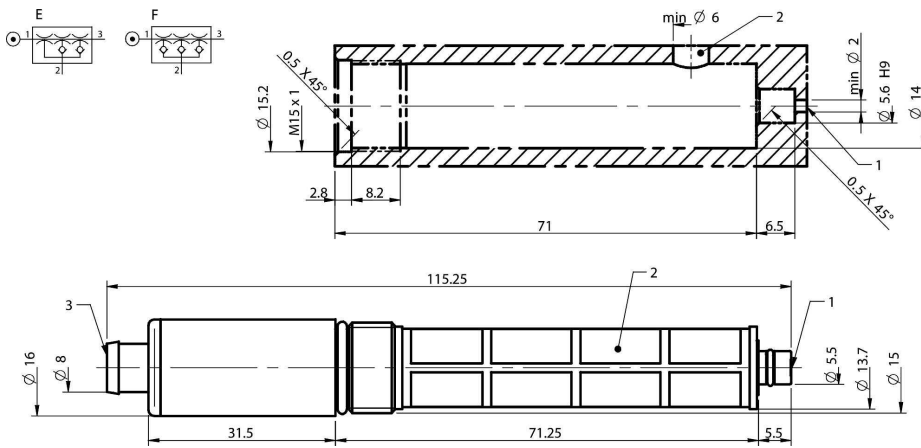

Ordering information, accessories

Description	Art. No.
Silencer COAX® MINI	0111977
Exhaust adapter	0106344