

BL30-2 FDA



BL30-2 FDA

Suction cup with long bellows

- The silicone material complies with FDA 21 CFR 177.2600.
- Suitable for level adjustment.
- Lifting movement to separate small and thin objects.
- Less suitable when the lifting force is parallel to the surface of the object.

Lifting forces & Technical data

Outer Dia in	Lifting force vertical to the surface, lbf, at vacuum level			Lifting force parallel to the surface, lbf, at vacuum level			Volume in ³	Min. curve radius in	Max. vertical movement in	Weight rubber part oz
	6 -inHg	18 -inHg	27 -inHg	6 -inHg	18 -inHg	27 -inHg				
1.18	0.14/1.40*	0.36/3.60*	—	—	—	—	0.61	0.31	0.79	0.25

*Lifting force with reinforcement rings.

Material specifications

Material	Color	Hardness °Shore A	Temperature range °F
Silicone, SIL FDA	Transparent	50	-40–392

Material resistance


Material	Wear resistance	Oil	Weather & ozone	Hydrolysis	Gasoline	Concentrated acids	Alcohol	Oxidation
Silicone, SIL FDA	Good	Poor	Excellent	Fair	Poor	Poor	Good	Excellent

Spare Part

Spare Part	Material	Temperature range °F	Part No.
Reinforcement ring for BL30-2, 4x	Polyamide, PA	-40-230	31.50.072


Ordering information

Suction cups with fitting		Part No.
A	Suction cup BL30-2 Silicone FDA, 1/8" NPSF female, with mesh filter	BL30-2.21.04AG
B	Suction cup BL30-2 Silicone FDA, G1/4" male, with mesh filter	BL30-2.21.04AB
B	Suction cup BL30-2 Silicone FDA, 1/4" NPT male, with mesh filter	BL30-2.21.04AC

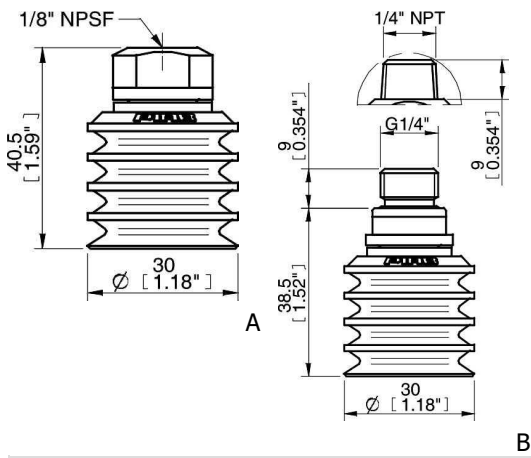

Rubber parts

Rubber parts		Part No.
Suction cup BL30-2 Silicone FDA		BL30-2.21



Fittings

Fittings		Part No.
Fitting 1/8" NPSF female, 30–40, with mesh filter		04AG
Fitting G1/4" male, 30–40, with mesh filter		04AB
Fitting 1/4" NPT male, with mesh filter		04AC