

# P3010



## P3010

- Patented COAX® technology.
- Available with three-stage COAX® cartridge MINI. Choose an Si cartridge for extra vacuum flow, a Pi cartridge for high performance at low feed pressure or an Xi cartridge when high flow and deep vacuum is needed.
- Includes a flow-through silencer and a built-in vacuum filter for harsh environments.
- Suitable for fast and reliable evacuation in sealed systems.
- Slim, compact, configurable and modular design.
- Low weight.

### Technical data

Description	Unit	Value
Feed pressure, max.	MPa	0.7
Noise level	dBA	66–68
Temperature range	°C	-10–50
Weight	g	110-330
Material		PP, PA, NBR, Al, SS

### Vacuum flow

COAX® Cartridge	Feed pressure* MPa	Air consumption NI/s	Vacuum flow (NI/s) at different vacuum levels (-kPa)											Max vacuum -kPa
			0	10	20	30	40	50	60	70	80	90		
Pi12-3	0.314	0.44	1.40	0.60	0.44	0.27	0.19	0.14	0.10	0.060	0.030	—	90	
Si08-3	0.6	0.44	1.34	0.73	0.55	0.35	0.23	0.17	0.13	0.08	—	—	75	
Xi10-3	0.5	0.46	1.43	0.70	0.50	0.33	0.19	0.15	0.11	0.07	0.045	0.011	94	

For vacuum flows at other feed pressures, see COAX® Cartridge data sheets. \*Feed pressure tolerance, +/- 0.01 MPa

### Evacuation time

COAX® Cartridge	Feed pressure* MPa	Air consumption NI/s	Evacuation time (s/l) to reach different vacuum levels (-kPa)											Max vacuum -kPa
			10	20	30	40	50	60	70	80	90			
Pi12-3	0.314	0.44	0.08	0.23	0.49	1.00	1.70	2.60	3.90	6.30	—	—	90	
Si08-3	0.6	0.44	0.10	0.25	0.48	0.80	1.30	2.30	4.60	—	—	75		
Xi10-3	0.5	0.46	0.09	0.26	0.50	0.90	1.5	2.2	3.4	5.2	8.8	94		

For evacuation times at other feed pressures, see COAX® Cartridge data sheets. \*Feed pressure tolerance, +/- 0.01 MPa

### Blow flow

COAX® cartridge	Feed pressure MPa	Air consumption NI/s	Blow flow (NI/s) at different pressure levels (kPa)												Max pressure kPa
			0	20	40	60	70	80	90	100	110	120	130	140	
Pi12-3	0.6	0.75	1.87	1.4	1.33	1.12	1.03	1.03	1.03	1.03	1.0	0.95	0.86	0.79	140

Si08-3	0.6	0.44	1.78	1.16	1.03	0.86	0.80	0.75	0.66	0.53	—	—	—	—	70
Xi10-3	0.6	0.54	1.8	1.3	1.1	0.98	0.85	0.84	0.79	0.71	0.61	—	—	—	90

## Ordering information

### 1. Select housing P3010 Code

Housing, connection Ø=6 mm	00
Housing, connection 1/8" NPSF	01

### 2. COAX® cartridge modules P3010 Code

COAX® cartridge module Pi12-3FSx1	AE
COAX® cartridge module Pi12-3FSx1, non-return valve	AF
COAX® cartridge module Pi12-3FSx2	AG
COAX® cartridge module Pi12-3FSx2, non-return valve	AH
COAX® cartridge module Si08-3FSx1	AA
COAX® cartridge module Si08-3FSx1, non-return valve	AB
COAX® cartridge module Si08-3FSx2	AC
COAX® cartridge module Si08-3FSx2, non-return valve	AD
COAX® cartridge module Xi10-3FSx1	AI
COAX® cartridge module Xi10-3FSx1, non-return valve	AJ
COAX® cartridge module Xi10-3FSx2	AK
COAX® cartridge module Xi10-3FSx2, non-return valve	AL

### 3. Select connection and function module P3010 Code

B	Connection module high 6x1/8"	01
A	Connection module low 3x1/8"	02
	Function Quick-release connection, 10 and 6 mm, 3 cm <sup>3</sup>	04
	Function Quick-release connection, 8 and 6 mm, 30 cm <sup>3</sup>	05
	Function Quick-release connection, 8 and 6 mm, 60 cm <sup>3</sup>	06
	Function Quick-release connection, 10 and 6 mm, 30 cm <sup>3</sup>	07
	Function Quick-release connection, 10 and 6 mm, 60 cm <sup>3</sup>	08
	Function Quick-release connection, 1/4" NPSF and 6 mm, 3 cm <sup>3</sup>	09
	Function Quick-release connection, 1/4" NPSF and 6 mm, 30 cm <sup>3</sup>	10
	Function Quick-release connection, 1/4" NPSF and 6 mm, 60 cm <sup>3</sup>	11
	Function Quick-release connection, 8 and 6 mm, 3 cm <sup>3</sup>	12
	Function AVM™2 NO	27
	Function AVM™2 NC (power off - NO)	28
	Function CU NC	29
	Function AVM™2 NO, automatic blow-off (1 sec)	30
	Function AVM™2 NC, automatic blow-off (1 sec)	31
	Function AVM™2 NC 2 (power off - NC)	32
	Function CU NO	33

For detailed information on Quick-release, AVM™2 and CU, see separate datasheets.

### 4. Select ES P3010 Code

No energy saving	AA
Valve DS23	AB
piSAVE onoff 2/2 NO, large hysteresis	AC

For detailed information on Valve DS 23 and piSAVE onoff, see separate datasheets.

5. Select vacuum sensing

P3010 Code

No vacuum sensing	00
Vacuum switch, adjustable, PNP NO MM8	01
Vacuum switch, adjustable, NPN NO MM8	02
Vacuum switch, adjustable, PNP NO LM8	05
Vacuum switch, adjustable, PNP NO DM8	09
Vacuum switch, adjustable, NPN NO DM8	10
Vacuum switch inductive, adjustable with knob	11
Vacuum switch VS4015 Ø6, 30 -kPa	18
Vacuum switch VS4015 Ø6, 50 -kPa	19
Vacuum switch VS4015 Ø6, 70 -kPa	20
Vacuum switch VS4016 G1/8" male, 30 -kPa	21
Vacuum switch VS4016 G1/8" male, 50 -kPa	22
Vacuum switch VS4016 G1/8" male, 70 -kPa	23

For detailed information on vacuum switches, see separate datasheets.


Example

Ordering number

Housing, connection Ø 6 mm Pi12-3FSx1, Connection module high 6x1/8", no energy saving, no vacuum sensing

P3010.00.AE.01.AA.00

N.B. Please note that not all combinations are possible.

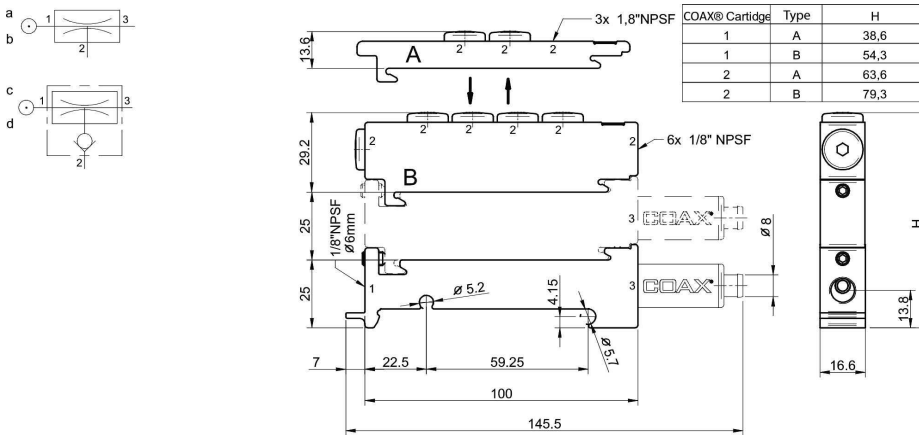

Ordering information, accessories

Description

Art. No.

Sealing kit P3010, NBR

0104201

The sealing kit includes flap valves, compressed air filter and vacuum filter.